Series DLA
Downlight

GradeONE™

Product Overview

The DLA downlight features a LED trim module with a stylish white baffle. Using a convenient quick connect feature, it is easily installed in new construction with the included 6" dedicated LED can. It may also be used to retrofit existing 5" or 6" incandescent cans using an included screw-in adaptor. DLA features up to 1000 nominal lumens and 5 field-selectable CCTs to suit a wide range of recessed lighting applications.



Key Features

Data is based on the 4000K CCT setting.

Lumens:	1000
Wattage:	14
LPW:	85.21
Color Temperature:	2700K | 3000K | 3500K | 4000K | 5000K
CRI:	90
Optics | Beam Angle:	110°
Light Source:	LED
Dimmable:	Triac

Voltage:	120V
Operating Temperature:	-20°C to 45°C (-4°F to 113°F)
Housing:	Aluminum
Finish:	White
Mounting Options:	Recessed / Retrofits in existing incandescent can housing
Lifespan:	139,000
Warranty:	5-Yr Limited Warranty
Ratings and Certifications:	cETLus, Damp Location, Energy Star, FCC Part 15, Subpart B, Class B, Title 24

Ordering Information

Refer to the ordering table to select the appropriate options for your application.

Example: DLA1LULSCTWH

SERIES	LUMENS	VOLTAGE	CCT	FINISH
DLA	**1L** 1000 Lumens	**UL** 120V	**SCT** 2700K | 3000K | 3500K | 4000K | 5000K	**WH** White

SELECTABLE CCT · DIMMABLE TRIAC · 120V ONLY VOLTAGE · 90+ CRI · DAMP LOCATION · TITLE 24 COMPLIANT · ENERGY STAR · 5 YEAR WARRANTY

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320, Franklin WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com

Rev. Date: V1 10/08/2026

Performance Data

Luminaire Performance

PRODUCT	POWER (WATTS)	CRI	2700K		3000K		3500K		4000K		5000K	
			LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY	LUMENS	EFFICACY
DLA	14	90	1042	72.92	1145	79.18	1247.80	84.54	1227	85.21	1140	82.67


Electrical Performance

OPERATING TEMPERATURE RANGE	ESTIMATED L_{70} LIFETIME @ 25°C (77°F)	POWER FACTOR	TOTAL HARMONIC DISTORTION	DIMMABLE	SURGE PROTECTION
-20°C to 45°C (-4°F to 113°F)	L70>139,000Hrs.	>0.9 at full load	<20% at full load	Triac	0.5kV

AMP Draw

	CCT	120V
DLA	2700K	0.12
	3000K	0.12
	3500K	0.12
	4000K	0.12
	5000K	0.12

Line Drawings

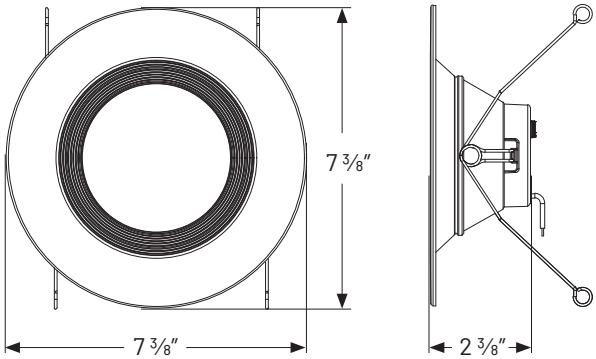

Fixture Dimensions

SERIES	MOUNTING OPTIONS	RECOMMENDED MOUNTING HEIGHT	PRODUCT DIMENSIONS (L x W x H - FRACTIONS ROUNDED UP TO THE NEAREST 1/8")	PRODUCT WEIGHT (LBS.)
DLA	Recessed / Retrofits in existing incandescent can housing	7 to 10 Feet	7 3/8" L × 7 3/8" W × 2 3/8" H	0.33

© 2026 GradeOne, all rights reserved. For informational purposes only. Content is subject to change. The UL logo is a registered trademark of UL LLC.

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320, Franklin WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com