EECCTXA Series

Exit & Emergency Combo

GradeONE™

Product Overview

The EECCTXA exit & emergency combo features an ultra-compact profile for easy installation. A field-selectable single/double face design with bright red lettering and directional indicators ensure high visibility identification of exit and emergency access points. EECCTXA may be top, end, or wall mounted for a range of emergency exit and safety applications.



Key Features

Wattage:	2 (1.1 watt LED per head)
Color Temperature:	5000K
Light Source:	LED
Electrical:	Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 1.2V long life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
Dimmable:	Dimming leads are not available for use in the field
Voltage:	120/277V

Operating Temperature:	0˚C to 50˚C (32˚F to 122˚F)
Letter LED Color:	Ultra-bright, energy efficient, long-life Red LED EXIT sign illumination
Housing:	Specification-grade, low profile thin plastic design. Patent-pending, field selectable universal single/double face configuration. Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white finish. EZ snap-out chevron directional indicators.
Finish:	White
Mounting Options:	Mounting canopy included for top or end mount, universal knockout pattern on back plate for wall mount
Warranty:	5-Yr Limited Warranty
Ratings and Certifications:	UL Listed, Damp Location, Title 20

Ordering Information

Refer to the ordering table to select the appropriate options for your application.

Example: EECCTXARDVWH

SERIES	**LETTER COLOR**	**VOLTAGE**	**FINISH**
EECCTXA	**R** Red	**DV** 120/277V	**WH** White

120V/277V VOLTAGE · DAMP LOCATION · CERTIFIED IN TITLE 20 · WARRANTY 5 YEAR WARRANTY


Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320 Franklin, WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com

Rev. Date: V1 10/08/2026

Performance Data

AMP Draw				
SERIES	**INPUT WATTS (W)**		**INPUT AMPS (A)**	
	120V	**277V**	**120V**	**277V**
EECCTXA	1.2	1.2	0.092	0.092

Line Drawings

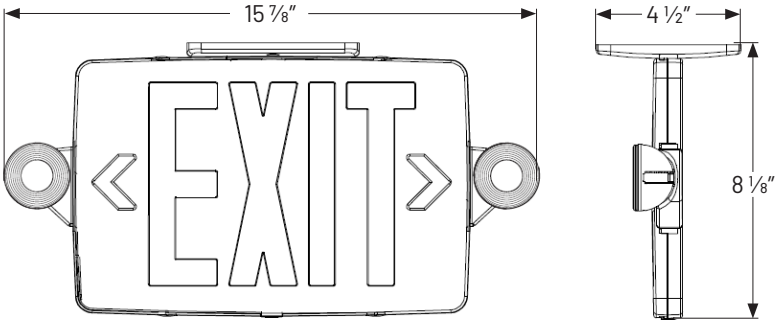

Fixture Dimensions				
SERIES	**MOUNTING OPTIONS**	**RECOMMENDED MOUNTING HEIGHT**	**PRODUCT DIMENSIONS** (L x W x H - FRACTIONS ROUNDED UP TO THE NEAREST 1/8")	**PRODUCT WEIGHT** (LBS.)
EECCTXA	Mounting canopy included for top or end mount, universal knockout pattern on back plate for wall mount	7 to 10 Feet	4 1/2" L × 15 7/8" W × 8 1/8" H	2.3

© 2026 GradeOne, all rights reserved. For informational purposes only. Content is subject to change. The UL logo is a registered trademark of UL LLC.

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320 Franklin, WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com