EELA Series

Exit & Emergency Light

GradeONE™

Product Overview

The EELA exit & emergency light features two long-lasting, efficient, ultra-bright white LED adjustable lamp heads. An internal solid-state transfer switch automatically connects the internal battery to the lamp heads for minimum 90-minute emergency illumination during outages. EELA is equipped with a solid-state, two rate charger that automatically initiates during battery discharge to fully recharge the battery in 24 hours.



Key Features

Lumens:	154
Wattage:	1.5 watt (3 LEDs x 0.50 watt) per head
Color Temperature:	5000K
Light Source:	LED
Electrical:	Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery). Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing. 3.6V long life, maintenance-free, rechargeable NiCd battery. Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination. Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

Dimmable:	Dimming leads are not available for use in the field
Voltage:	120/277V
Operating Temperature:	0˚C to 50˚C (32˚F to 122˚F)
Housing:	Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic
Finish:	White, Black
Mounting Options:	Universal knockout pattern on back plate for surface mount, suitable for wall or ceiling mount, knockout for conduit applications
Warranty:	5-Yr Limited Warranty
Ratings and Certifications:	Damp Location, CEC Title 20, UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes

Ordering Information

Refer to the ordering table to select the appropriate options for your application.

Example: EELAWH

SERIES	FINISH	REMOTE CAPACITY*	SELF DIAGNOSTIC*	ASSEMBLED IN THE USA*
EELA	**WH** White **BK** Black	**Blank** **RC** Remote Capacity	**Blank** **STD** Self Diagnostic	**Blank** **USA** Assembled in the USA

*For more information on options, please see last page.

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320 Franklin, WI 53132

Customer Service: (833)730-3259
Email: support@lightingproplus.com


Rev. Date: V1 10/07/2026

Performance Data

AMP Draw

SERIES	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
EELA	0.6	0.7	0.075	0.075
	0.6	0.7	0.09	0.09
	0.8	1	0.12	0.12

Line Drawings

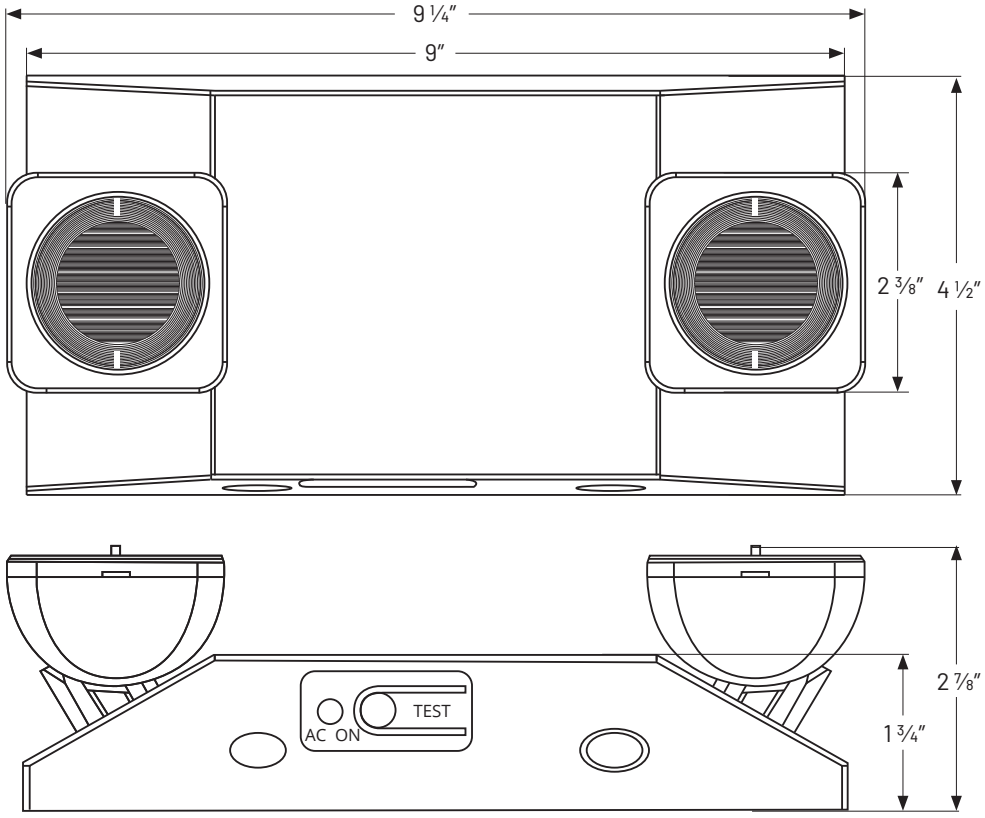

Fixture Dimensions

SERIES	MOUNTING OPTIONS	RECOMMENDED MOUNTING HEIGHT	PRODUCT DIMENSIONS (L x W x H - FRACTIONS ROUNDED UP TO THE NEAREST 1/8″)	PRODUCT WEIGHT (LBS.)
EELA	Suitable for wall or ceiling mount. Universal knockout pattern on back plate for surface mount. Knockout for conduit applications.	10 Feet	2 ⅞″ L × 9 ¼″ W × 4 ½″ H	1.3

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320 Franklin, WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com

Additional Options

REMOTE CAPACITY	SELF DIAGNOSTIC
SKU: RC USE: Remote capacity of 2.5 watts.	SKU: SDT USE: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

ASSEMBLED IN THE USA
SKU: USA USE: Substantial transformation assembly in U.S. complies with "Assembled in USA" under the Buy American Act.

© 2026 GradeOne, all rights reserved. For informational purposes only. Content is subject to change. The UL logo is a registered trademark of UL LLC.

Website: www.lightingproplus.com
Office: 7095 South Ballpark Drive, STE 320 Franklin, WI 53132
Customer Service: (833)730-3259
Email: support@lightingproplus.com