

DL-KFS

Installation instructions

PREPARATION

Shut off the power at circuit breaker and remove existing fixture, including the crossbar.

Carefully unpack your new fixture and lay out all the parts on a clear area. Be careful not to lose any small parts necessary for installation.

MOUNTING THE FIXTURE (Fig. 1)

Secure the mounting plate (C1) to the junction box (A1) using junction box screws (E1). The side of the mounting plate marked 'GND'(C1) must face out.

CONNECTING THE WIRES (Fig. 2)

Connect the electrical wires making sure that all wire connectors are secured. If your outlet box has a green or bare copper ground wire, connect the fixture's ground wire to it. Otherwise, connect the fixture's ground wire directly to the mounting plate (C1) using the screw (E1) provided. After wires are connected, tuck them carefully inside the junction box.

Place the fixture over the mounting plate (C1) and secure with screws (E1)

COMPLETING THE INSTALLATION (Fig. 3)

To prevent moisture from entering the outlet box and causing a short, use clear caulking (i.e. indoor/outdoor silicone sealant) to outline the outside of fixture back plate where it meets the wall leaving a space at bottom to allow moisture a means to escape (Fig.3).

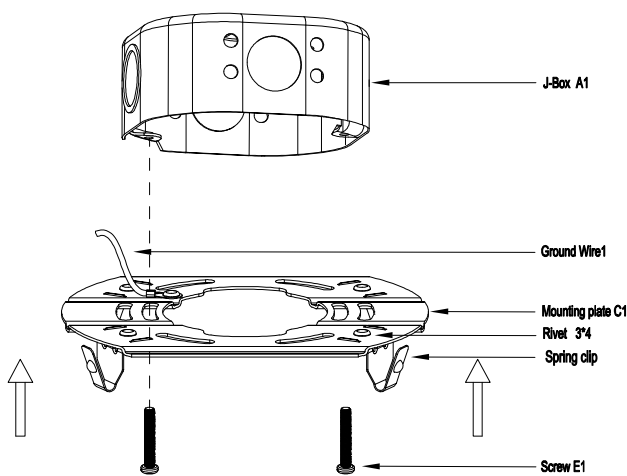


figure 1

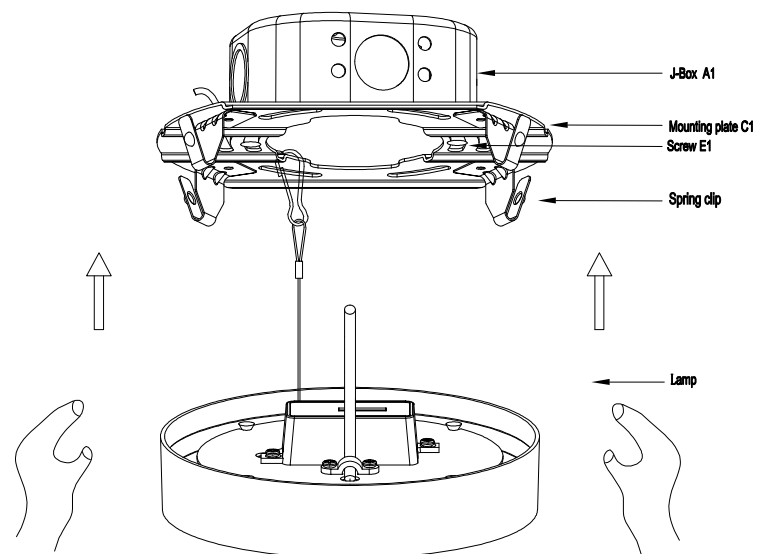


figure 3

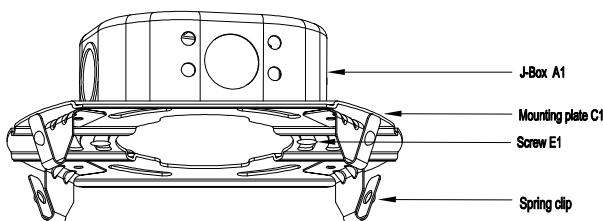


figure 2

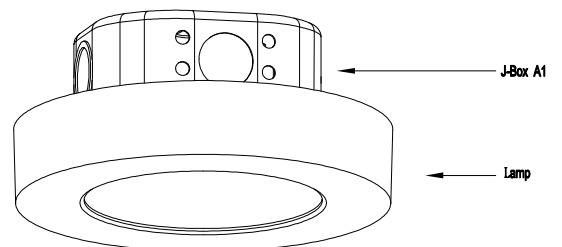


figure 4