

Product Overview

The WPMA wall mount features a stylish, compact design ideal for illuminating smaller spaces, such as entryways and walkways. 3 field-selectable CCT options allow color temperature to be easily adjusted during installation. An integrated photocell adds dusk to dawn function, which may be disabled using an internal switch.



Key Features

Data is based on the 4000K CCT setting.

|                    |                                                        |
|--------------------|--------------------------------------------------------|
| Lumens:            | 3383                                                   |
| Wattage:           | 24                                                     |
| LPW:               | 144                                                    |
| Color Temperature: | 3000K   4000K   5000K                                  |
| CRI:               | 80                                                     |
| Light Source:      | LED                                                    |
| Dimmable:          | 0-10V Dimming leads are available for use in the field |
| Voltage:           | 120-277V                                               |

|                             |                                                      |
|-----------------------------|------------------------------------------------------|
| Operating Temperature:      | -40°C to 40°C (-40°F to 104°F)                       |
| Housing:                    | Polycarbonate                                        |
| Finish:                     | Bronze                                               |
| Mounting Options:           | Wall Mount                                           |
| Accessories:                | Photocell (Included)                                 |
| Lifespan:                   | 50,000                                               |
| Warranty:                   | 5-Yr Limited Warranty                                |
| Ratings and Certifications: | cULus, Wet Location, FCC Part 15, Subpart B, Class A |

Ordering Information

Refer to the ordering table to select the appropriate options for your application.

Example: WPMA3LULSCTBZ

| SERIES | LUMENS         | VOLTAGE     | CCT                       | FINISH    |
|--------|----------------|-------------|---------------------------|-----------|
| WPMA   | 3L 3000 Lumens | UL 120-277V | SCT 3000K   4000K   5000K | BZ Bronze |



Performance Data


| Luminaire Performance |              |     |       |       |       |
|-----------------------|--------------|-----|-------|-------|-------|
| PRODUCT               | MEASUREMENTS | CRI | 3000K | 4000K | 5000K |
| WPMA                  | Lumens       | 80  | 3123  | 3570  | 3383  |
|                       | Watt         |     | 23    | 23    | 23    |
|                       | LPW          |     | 133   | 155   | 144   |

| Electrical Performance         |                                                  |                   |                           |                                                        |                  |
|--------------------------------|--------------------------------------------------|-------------------|---------------------------|--------------------------------------------------------|------------------|
| OPERATING TEMPERATURE RANGE    | ESTIMATED L <sub>70</sub> LIFETIME @ 25°C (77°F) | POWER FACTOR      | TOTAL HARMONIC DISTORTION | DIMMABLE                                               | SURGE PROTECTION |
| -40°C to 40°C (-40°F to 104°F) | L70>50,000 Hrs.                                  | >0.9 at full load | <20% at full load         | 0-10V Dimming leads are available for use in the field | 4kV              |

| AMP Draw |       |      |      |      |
|----------|-------|------|------|------|
| WPMA     | CCT   | 120V | 240V | 277V |
|          | 3000K | 0.19 | 0.1  | 0.08 |
|          | 4000K | 0.19 | 0.1  | 0.08 |
|          | 5000K | 0.19 | 0.1  | 0.08 |



Line Drawings

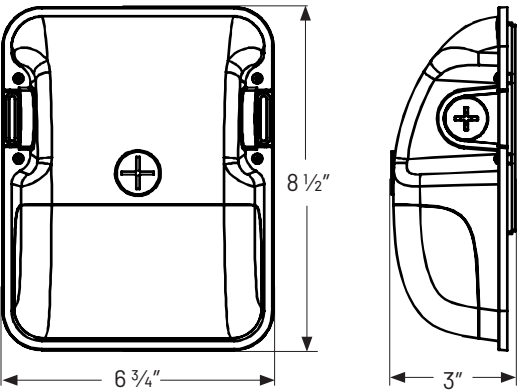

| Fixture Dimensions |                  |                             |                                                                              |                          |
|--------------------|------------------|-----------------------------|------------------------------------------------------------------------------|--------------------------|
| SERIES             | MOUNTING OPTIONS | RECOMMENDED MOUNTING HEIGHT | PRODUCT DIMENSIONS<br>(L x W x H - FRACTIONS ROUNDED UP TO THE NEAREST 1/8") | PRODUCT WEIGHT<br>(LBS.) |
| WPMA               | Wall Mount       | 10 to 15 Feet               | 3" L x 6 3/4" W x 8 1/2" H                                                   | 1.61                     |

Accessories

|  | INTEGRATED PHOTOCELL (INCLUDED) |
|--|---------------------------------|
|  | SKU: N/A<br>USE: Photocontrol   |

