

Installation Instruction

IMPORTANT


READ CAREFULLY BEFORE INSTALLING FIXTURE.
RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.

The fixture must be wired in accordance with the National Electrical Code and all applicable local codes. Proper grounding is required for safety. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.


WARNING: Make certain power is OFF before installing or maintaining fixture. No user serviceable parts inside.

WARNING: Do not use an electric generator to test LED fixtures.


WARNING: Min 90 °C SUPPLY CONDUCTORS.

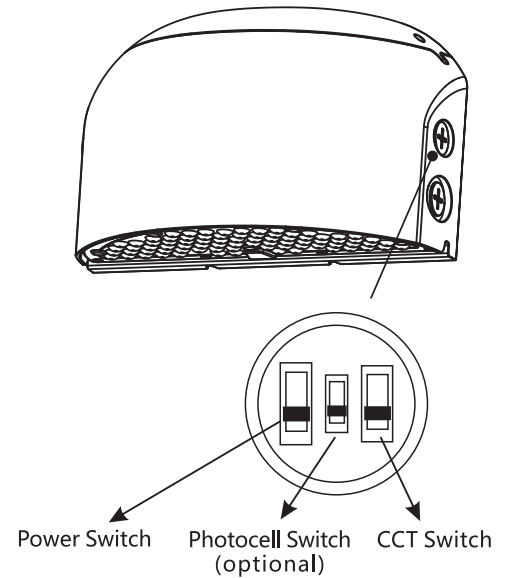


Junction Box Installation

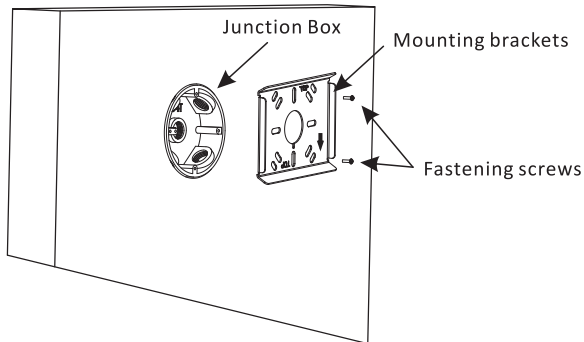


1. Fix the mounting bracket on the junction box with 2 screws

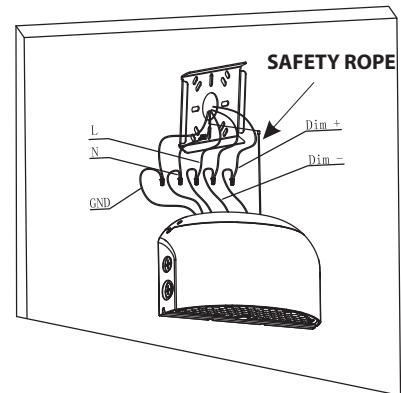

2. Hang the safety rope on the mounting bracket; make wiring connections according with wiring diagram, then push the wires and safety rope inside the junction box

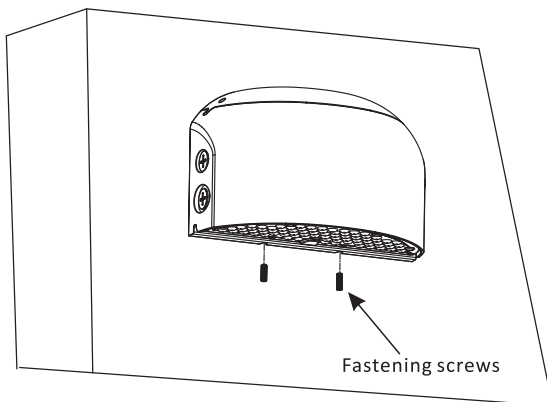


3. Fasten the fixture to the mounting bracket through the hexagon socket screws at the bottom of the fixture

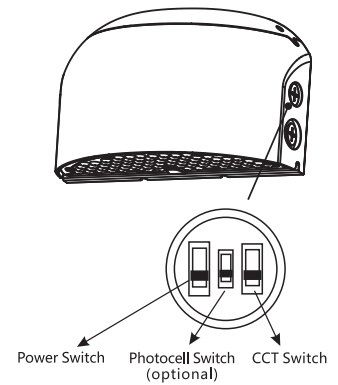


4. Adjust the power and CCT switches as needed, the installation is complete

Installation Instruction


Conduit Installation

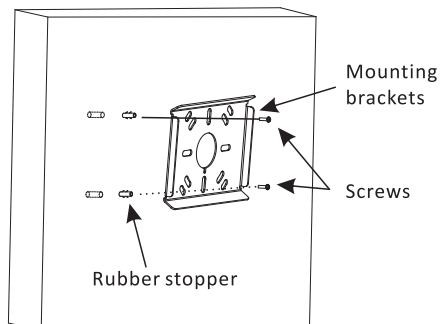


1. Remove the mounting bracket from luminaire and secure the mounting bracket to the wall.

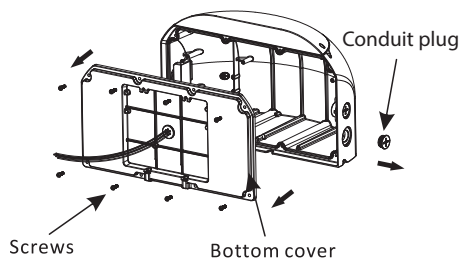


2. Loosen screws and open the bottom cover of the luminaire then pull the wires inside. Remove the conduit plug

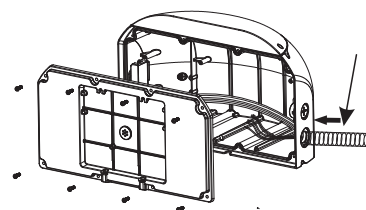


3. Attach the conduit to the luminaire and make wiring connections according with wiring diagram

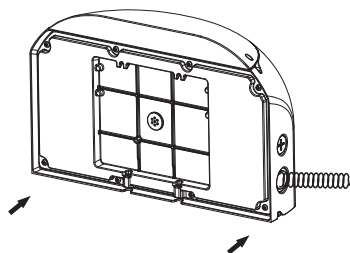

4. Close the luminaire and secure the back the bottom cover

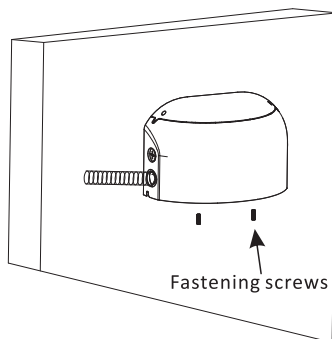

5. Fasten the fixture to the mounting bracket using the hexagon socket screws at the bottom of the fixture

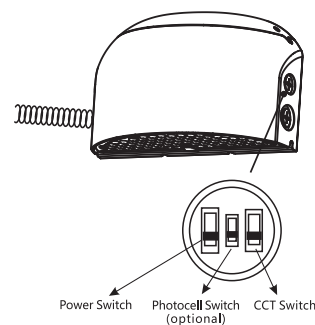

6. Adjust the power and CCT switches as needed, the installation is complete

Wiring Diagram

